

www.synergys-technologies.com



### LEAK**SHOOTER®** LKS1000-V3TOPRO

# Ultrasonic compressed air, gas and vacuum leak detector with camera.

Compressed air is a costly form of energy and 20 to 40% of it is lost through leaks.

Systematically checking for and eliminating leaks can therefore bring considerable energy savings.

LEAKSHOOTER<sup>®</sup> LKS1000-V3T**OPRO** is a unique and sensational detection device:

- It uses a camera and a dynamic on screen target to precisely find leak location (patent).

- It features a new concept of Steam Trap diagnostic: The STRAPSHOOTER®.

The STRAPSHOOTER<sup>®</sup> program is an Easy to use firmware which can automatically diagnose your Steam Trap condition state.

LEAKSHOOTER<sup>®</sup> LKS1000-V3T**OPRO** is extremely sensitive, capable to find compressed air leaks (not bigger than the size of syringe needle) at a distance of 20m.

### The LEAKSHOOTER® LKS1000-V3T**O**PRO is used like a camera.

When it comes near a leak, a dynamic yellow target appears on the large colour screen. The target turns red and shrinks as it approaches the source of the leak. A bar graph at the bottom of the screen accompanies and facilitates the search.

When the device is facing the leak, a cross appears in the centre of the target. It is then possible to photograph and save the precise location of the leak.



Each photo is numbered, dated and timed and shows the dB RMS level of the leak.

The photos can be uploaded directly onto a PC via a USB cable (supplied), ready to be attached to inspection reports.

It is still possible, whilst visually searching for a leak, to use the traditional method of leakdetection,listeningforthehissingsound of the leak using the professional headphones also supplied, which can be plugged directly into the device.

Various accessories are available for the LEAKSHOOTER<sup>®</sup> LKS1000-V3T**OPRO** enabling it to be used for other applications as well as leak detection.



### **NEW!**

## STRAP**SHOOTER**<sup>®</sup> program: Detect defective trap in seconds!

Steam Trap Surveys with traditionnal detector is often complex and is not accessible to everyone.

Simply check temperatures on the Inlet and Outlet trap pipes.

Hear what happened in the trap and wait about the AUTO mode conclusion.

LEAKSHOOTER® LKS1000-V3TOPRO uses:

- Ultrasonic contact probe to analyze the Steam Trap working progress
- Embedded infrared pyrometer to measure the pipe T° IN & T° OUT
- STRAPSHOOTER® program to see, hear, analyze and report the Steam Trap condition state
- Embedded camera to take the Steam Trap picture for reporting


#### Can detect not OK: BIG LEAK-CLOSED-DROWNED-FAST CYCLING-UNKNOWN and OK: CYCLING-MODULATING steam trap conditions.

(Compatible with ball float, inverted bucket, thermodynamic and thermostatic traps.)

Example of an



mode acquisition with an OK modulating trap (ex: Mechanical ball float)

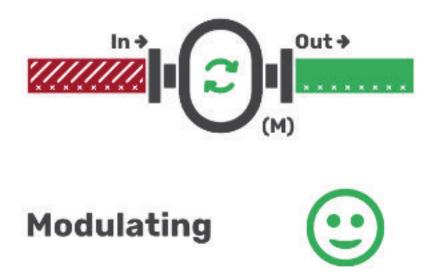



## Live-steam losses caused by leaking steam traps represent a major economic factor!

#### How much does it cost?

STEAM LEAKAGE = A (kg/h) OPERATION HOURS = B (h/year) STEAM UNIT COST = C ( $\pm$  20€/1.000 kg)

COST = (AxBxC) / 1.000 (€/year)

### **Example for only one leak:**

With continuous operation, B = 8.000h/year

Small leak (4 kg/h) = 640 €/year ! Standard leak

### = 1.120 €/year !

Big leak (70 kg/h)

= 11.000 €/year !



Please note these values are approximate.

#### SPECIFICATIONS LKS1000-V3TOPRO

Sensitivity	Detects a leak of 0,1 mm at 3 bars at 20 m
Camera	Colour 640 x 480 pixels + LED lighting
Display	Capacitive touchscreen - LCD Colour 5,7" 640 x 480 pixels
Pictures	BMP, number, name, date and time
Dynamic target	White circle for leak detection Colored circle with cross for the leak severity
Measurements	dB RMS and MAX RMS
Memory	Up to 1000 pictures, can be uploaded to PC
Communication	USB cable supplied
US sensor	Open type - Bandwidth ± 2 kHz to - 6 dB - Central frequency 40 kHz ± 1 kHz - Adjustable frequency mixer from 30 to 50 kHz - Adjustable gain from 40 to 106 dB
Thermal Camera	Flir Lepton 160x120 pixels, 50mK sensitivity, -10°C to +400°C, adjustable emissivity ${f \mathcal{E}}$
Headphones	Adjustable volume - Wired headphone LKSEAR
Power supply	Rechargeable Li-Ion battery
Autonomy	> 5 hours
Temperature range	- 10°C to + 50°C
Dimensions	H : 310 mm - W : 165 mm - D : 65 mm
Weight	700 gr for the LKS1000 3,8 kg including ABS case
CE Standards	CEM 2004/108/CE : EN61000-6-4 & EN61000-6-2
Accessories	<ul> <li>Ultrasonic emitter Reference : LKSDOME</li> <li>Flexible 400 mm US Sensor Reference : LKSFLEX</li> <li>Flexible 1500 mm US Sensor Reference : LKSFLEX1500</li> <li>Mechanical US sensor (steam trap - bearing) Reference : LKSPROBE</li> <li>Autonomous laser kit + support for LEAKSHOOTER. Option. Reference : LASERKIT</li> <li>LEAKREPORTEDITOR for report edition option. Available in different languages. Reference : LEAKREPORTEDITOR</li> </ul>



SYNERGYS TECHNOLOGIES has been established in 1996 in France, to offer innovative and professional solutions for preventive and predictive maintenance.

SYNERGYS TECHNOLOGIES is the inventor of the ultrasonic visualization concept with the LEAKSHOOTER<sup>®</sup>, the contour visualization concept with the T°SHOOTER<sup>®</sup> and of the MCP (Machine Condition Picture) concept with the VSHOOTER<sup>®</sup>.

We are present worldwide with professional and trained distributors.





LEAKSHOOTER® a SYNERGYS TECHNOLOGIES innovation

Quartier Plessier - 39, avenue du 8<sup>e</sup> Régiment de Hussards BP 30109 - 68132 ALTKIRCH CEDEX - FRANCE Tél. +33 (0)3 89 08 32 72 / Fax +33 (0)3 89 08 32 73 info@synergys-technologies.com www.synergys-technologies.com Distributed by :